C-SMART

MANUAL

C-SMART CAMERA-3030

ENGLISH

C-SMART

Contents

1 x C-Smart Camera3060
1 x Adapter
1 x LAN cable
1 x Wall-ceiling assembly material
1 x Sticker with drilling template
1 x Instruction manual
1 x Set screws and plugs

Product description

1080p Wifi camera with motion detection. Motorised rotation 350° horizontal and 120° vertical. MicroSD card slot. Wi-Fi 2,4G connection RJ45 LAN Gate. Video recording upon detection of movement. Snapshot function. Can be remotely used as room monitor. Listen and talk function. Nightvision within a range of 9 meter. High resolution 1080P 2.0 Megapixel 1920 x 1080

Product Specifications

Current voltage	Adapter 5 V
Network connection	Wifi and LAN
Video Resolution	1920 x 1080
Rotation	350° horizontal 120° vertical
Nightvision	Range up to 9 meter
Motion detection	Records with every movement

Function

Recording of image and sound on detection of movement. Remote house – and room monitoring. Night recording. Video recording on Micro SD card. Continuous recording overwriting old recordings. Desk and wall mount. Fully operational with the C-Smart app.

Product view

Rj45 GATE
Sd CARD SLOT
Reset button
5V adapter input
Wi-Fi antenna

ENGLISH

C-SMART

Connecting to the base

1. Connect the camera to the router with the LAN cable

2. Connect to the mains

3. Open the app in your smartphone

4. Go to “ADD SENSOR - > SCAN THE QR CODE FROM THE CAMERA - >

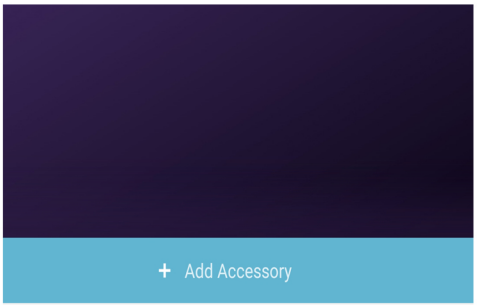

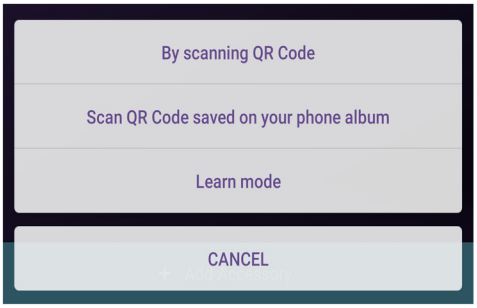

3. YOU CAN NOW ALLOW AN ANYTHING NAME FOR example "CAMERA CHILDREN ROOM" -> the system confirms that the addition has been successfully completed.

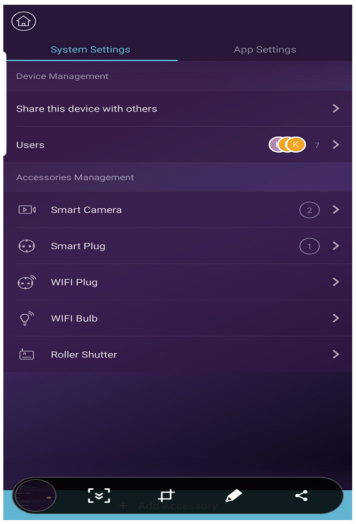



Set a security code

1. Go to “SYSTEM SETTINGS” and select “SMART CAMERA”.

2. Set a password for the camera

3. You can now operate the camera with the app.

Connect your camera with WiFi

1. Start the C-Smart app and go to “SYSTEM SETTINGS

2. Select “SMART CAMERA

3. Select “SETTINGS”(the small wheel icon)

4. Select “WIFI SETTINGS” and select the 2.4 G Wi-Fi network

5. Enter your password of the Wi-Fi network – attention enter twice

6. Save the password

7. The app indicates “succesfull”

8. You can now remove the LAN cable

Ready for use

The camera is now ready for use. Open the app. Select "smart camera" on the desktop. The camera needs approximately 2 seconds to connect. Press "play" and you will see the images that the camera is currently recording. To rotate the camera you can slide your fingers on your phone screen from left to right and from top to bottom. You will see an icon with arrows on the screen. If you press this, you will see on the screen small pins that you can press to move the camera in the desired direction. Next to the arrow icon you will see a camera icon. This allows you to take photos and save them. Next to this icon you will see an icon with a headphone. With this you can turn the camera microphone on and off. Next to this icon you will see an icon with a microphone. With this you control the microphone on your phone and you can speak to the camera.

ENGLISH

C-SMART

View recorded images

Go to the desktop. Select "smart camera". Go to "settings" - small wheels icon and choose "play video recording". You will see a list of the recorded videos here. Videos are only recorded when you have inserted a Micro SD card.

Report motion and start camera

Select "smart camera" on the desktop. Go to "camera settings". At "advanced settings" you see "report motion and start video recording". Set this to "ON". With motion detection, the camera will immediately start a recording and you will receive a push message that the motion has been detected.

Camera settings

In the “camera settings” you can set:

Camera password
Synchronize timezone with your phone
HD recording
Rotate horizontally
Rotate vertically
Wi-Fi settings
Format SD card

Operating with the APP

You can operate the camera in the app after installation. You will find the camera on the desktop.

Reset

On the back of the camera you will find a reset button. use a paper clip to press it. If you hold it down for 10 seconds, you reset the camera to the factory settings.

ENGLISH

C-SMART

Warranty

Our products are produced in accordance with the technical standards applicable at the production time and in accordance with our quality standards. The warranty only covers defects that are caused by manufacturing or material defects at the time of the sale. The warranty ends after two years, further claims are excluded. Defined defects must be submitted to your seller in writing, incl. Original proof of purchase and short error description. After verification within a reasonable period of time, the guarantor will decide on a possible repair or replacement. Defects and damage as a result of, for example, transport, faulty operation, improper use, wear, etc. are excluded from the warranty. The battery is excluded from the warranty.

Liability Limitation

This device complied with the current technical standard at the time of manufacture. We constantly strive to keep our products up-to-date with our latest technical status and manuals. We therefore reserve the right for technical changes and revisions / adjustments to the manual without prior notice. This device was up to date from manufacture to the current technical standard. The contents of the manual must be read carefully. For damage, for example as a result of incorrect operation or installation, improper use, defective or incorrect maintenance, non-compliance with safety instructions or generally applicable regulations, no liability is accepted. With proper use and installation, this device offers the functionalities described in the manual under the specified conditions. Depending on the relevant customer specific circumstances, an alarm activation is not always guaranteed.

Safety regulation

Read the manual carefully even if you are familiar with the type of product. No liability is accepted for damage as a result of not following the instructions. The device may only be used for the purpose specified in the manual. The device must inform you and give an alarm in an emergency! Therefore, regularly check the correct operation and the battery condition of the device to be well prepared if - but let's hope not - it really gets serious. Unusual high electromagnetic radiation, manipulations or other influences can cause malfunctions. Installation in the vicinity of radiation-emitting electrical equipment or in damp rooms is not permitted. Battery-operated equipment must not be operated at high temperatures and near sources of heat or exposed to direct sunlight. Always keep packaging and materials out of the reach of children - there is a risk of suffocation. Keep the operating instructions carefully.

IMPORTANT NOTE: Installation at an unfavorable location can lead to a reduction in function (s).

If you like to receive an EC declaration of conformity for this device, you can send an application by e-mail to: service@cresta-international.com

Cleaning

Use only slightly damp wipes for cleaning. Ensure that no water enters the device. Do not use any flammable, chemical, corrosive or abrasive cleaning agents.

ENGLISH

C-SMART

Removal of the device

We would like to point out that electrical and electronic equipment and batteries must not be disposed of with household waste, but must be disposed of and collected separately. Ask the competent authority in your city / municipality about the collection points for batteries and electrical / electronic waste.

Colophone

The copyright of the operating instructions rests exclusively with CRESTA INTERNATIONAL BV. For any form of reproduction, including on electronic data carriers, written permission from CRESTA INTERNATIONAL BV is required. Reprinting - also in extracts - is prohibited. Errata and technical changes reserved. All company and product names mentioned are trademarks or registered trademarks or trademarks of their respective owners. By using this product you agree with our terms and conditions and privacy regulations. You can download and / or view this on www.cresta-smart.com. Printing and typing errors and technical changes are reserved. More information can be found at: www.cresta-smart.com

CE

Herewith Cresta International BV declares that this device complies with the guidelines 2014/53 / EU, (RED) 2014/30 / EU, (EMC), 2011/65 / EU (RoHS) and the Low Voltage Directive (2014/35 / EU) .

The full text of the EU declaration of conformity can be found at the following internet address: www.cresta-international.com For technical questions about the product, please read the detailed operating instructions and observe the FAQ, which you can find on the following web page: www.cresta-international.com. If you still have questions, send them by e-mail to: service@cresta-international.com

ENGLISH